



F A S


P O W E R L I F T

POWER LIFT

- Linear design for easy cleaning;
- Lift with single-axis motion and pouch function for dispensing products, also of large dimensions, without tipping over;
- Product with drawal door with automatic opening/closing (with anti-crush safety);
- Optimal product withdrawal height: 540 mm;
- Patented, energy-saving, slide-in/slide-out refrigeration unit that can be replaced quickly;
- Patented lateral refrigeration ventilation for energy savings, condensation and optimal homogenization of temperatures;
- 32-bit electronics with USB 2.0 HOST;
- Power Led illumination with Energy Saving;
- Programming, cloning, and Audit functions using a standard USB pen drive;
- Graphic colour display 480x272 pixel with the possibility of a personalised slide shows and/or visualization of supplementary information (ex: product ingredients and nutritional value);
- Drawer Display (depending on configuration);
- Rielta RSI Lock;
- Easy Click System: for configuring the machine quickly and easily without any need for technical instruments;
- Illuminated keyboard;
- Standard anti-vandal coin return.



R744

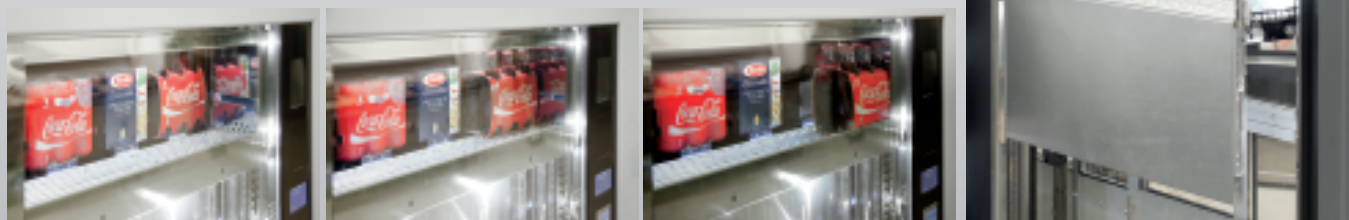

Description		Power LIFT
Dimensions mm (H x L x P)	mm	1830 x 1060 x 790
Size with door open	mm	1810
Min internal temperature		+3°C with fridge safety on the 3 lower drawers
Power supply	V/Hz	230/50
Rated fridge power	W	450
Weight	Kg	345
Refrigeration system	Compact (compression type, class N) - Ventilated evaporator - Cyclical defrosting	
Display	pixel	480 x 272
Protocols	MDB/ Executive	
Colour	Black RAL 9005 and aluminium	



Fas International Srl
Via Lago di Vico, 60
36015 Schio · Vicenza · Italy
T +39 0445 502011

F +39 0445 502.010
info@fas.it
www.fas.it

